

Technical information

Aero 42XL/42XL+



Characteristics

- With one sealing bar as standard (front)
- With double seal as standard (two sealing wires)
- Optional at no extra cost: Cut-off/wide seal
- Pump maintenance and cleaning program
- Standard sensor
- Three adjustable programs
- Standard soft air
- Standard red meat program
- Stainless steel casing and transparent lid
- Supplied with three insert plates for a faster cycle and good positioning

Options

- Liquid control


Accessoires

- Inclined insert plate (for packing liquids)
- External adapter
- Maintenance set for standard maintenance
- Trolley with shelves



Specs	Aero 42XL	Aero 42XL+
Chamber LxWxH (mm)	460x420x180	460x420x180
Machine LxWxH (mm)	613x491x469	613x491x469
Voltage	230V-1-50Hz 100V-1-50/60Hz 110/115V-1-60Hz 220V-1-60Hz	
Pump capacity 50 Hz/60 Hz (m3)	16 / 19	21 / 25
Machine cycle 50 Hz/60 Hz (sec.)	14-45 / 12-40	13-35 / 11 - 31
Power (kW)	0,6 - 1,0	0,8 - 1,0
Weight (kg)	68	72
Net seal length (mm)	410	410
Sealing bar configuration - Standard - Option	standaard 	option 

Dimensions mm

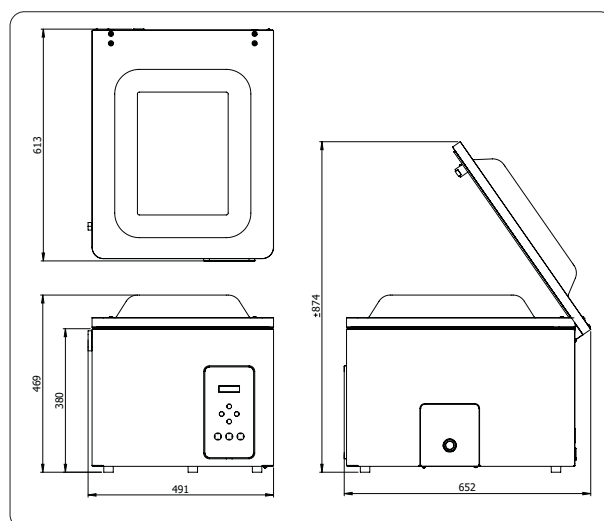

Henkelman
vacuum packaging

Henkelman BV
Titaniumlaan 10
5221 CK 's-Hertogenbosch
The Netherlands
+31 73 621 36 71

Sales support
info@henkelman.com

Service/technische support
service@henkelman.com