

## DT 60

### DIPTANK



### FEATURES

- Digital temperature control
- Hydraulic movement
- Stainless steel housing
- Optimal hygiene
- Maximal loading capacity: 60 kg
- Machine dimensions: 770 x 790x 1320mm
- Chamber dimensions: 500 x 600x 220mm
- Dipping depth: 220mm
- Cycle time: 3-5 seconds
- Power: 9,0 kW
- Voltage: 400V-3-50Hz
- Isolation balls prevent evaporation

### DESCRIPTION

Combined with a vacuum packaging machine, DT60 produces perfect skin packages for an aesthetic presentation. Shrink technology protects your product like a second skin. This machine fully complies with CE standards.



Henkelman offers standard 3 year warranty

### Sales support

P +31 73 621 36 71

E [info@henkelman.com](mailto:info@henkelman.com)

### Service/technical support


P +31 73 621 36 71

E [service@henkelman.com](mailto:service@henkelman.com)



# DIPTANK DT 60 – SPECS

## DIMENSIONS

In mm

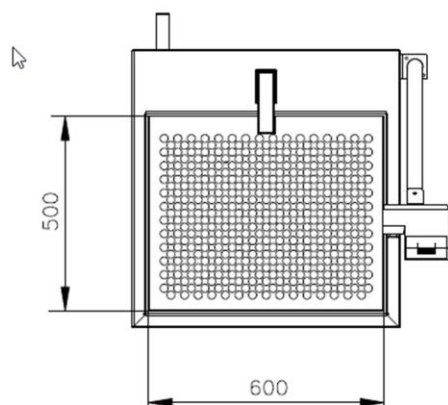

OUTER DIMENSIONS  
DT 60

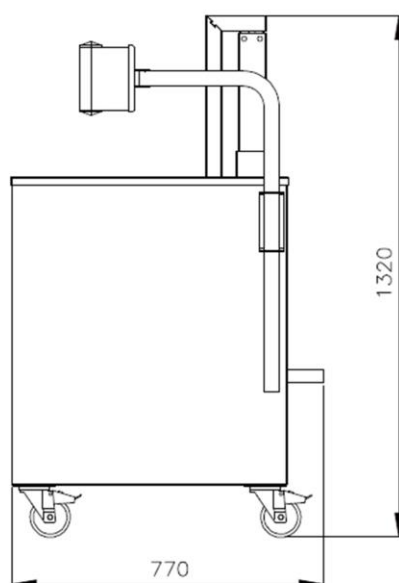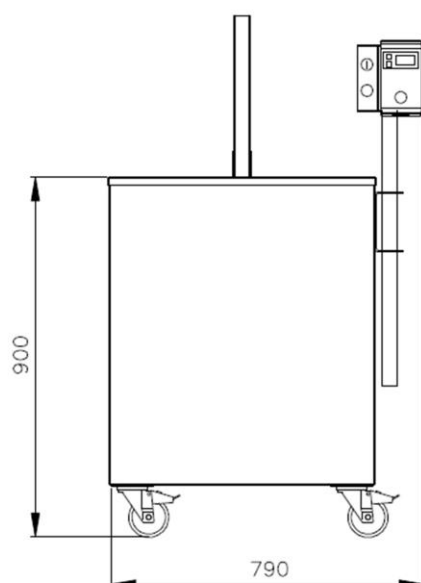

Model	Dimensions (mm)		Voltage (Hz)	Power (kW)	Weight (kg)
	Chamber (usable space) LxWxH	Machine LxWxH			
Diptank DT 60	500x 600x 220	770x 790x 1320	400V-3-50	9,0	120
* Other voltages available					



HENKELMAN BV  
Titaniumlaan 10  
5221 CK 's-Hertogenbosch  
The Netherlands

**Sales support**  
P +31 73 621 36 71  
E [info@henkelman.com](mailto:info@henkelman.com)  
**Service/technical support**  
P +31 73 621 36 71  
E [service@henkelman.com](mailto:service@henkelman.com)